



## Procedures to upgrade iNfinity 3000 Series Modems to Ver 13.0.0.3

1. Download iSite and Firmware package below from the link sent to you in an Email.

*idx3103/iDx3103-iSite.zip*

*idx3103/Remote\_Infiniti\_3000.zip*


2. Install iSite in your computer and save the following two files also in your computer:

- *linux\_2.4\_bsp-13.0.0.3.pkg*

- *remote\_3XXX-13.0.0.3.pkg*


3. After you have completed the above steps do the following:

- Log onto the remote using iSite
- “Download Package” using the “*linux\_2.4\_bsp-13.0.0.3.pkg*” resetting the remote as the picture on the following page shows:

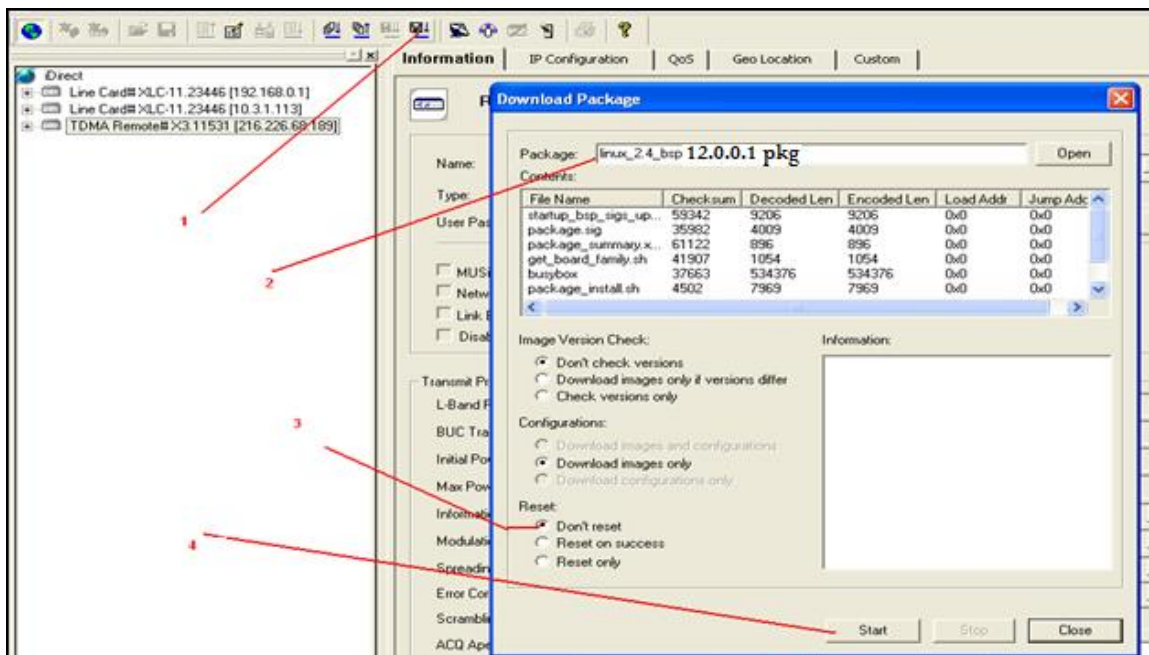


4. After the remote is back up “Download Package” using the “*remote\_3XXX-13.0.0.3.pkg*”

without resetting as shown in the picture on the following page:

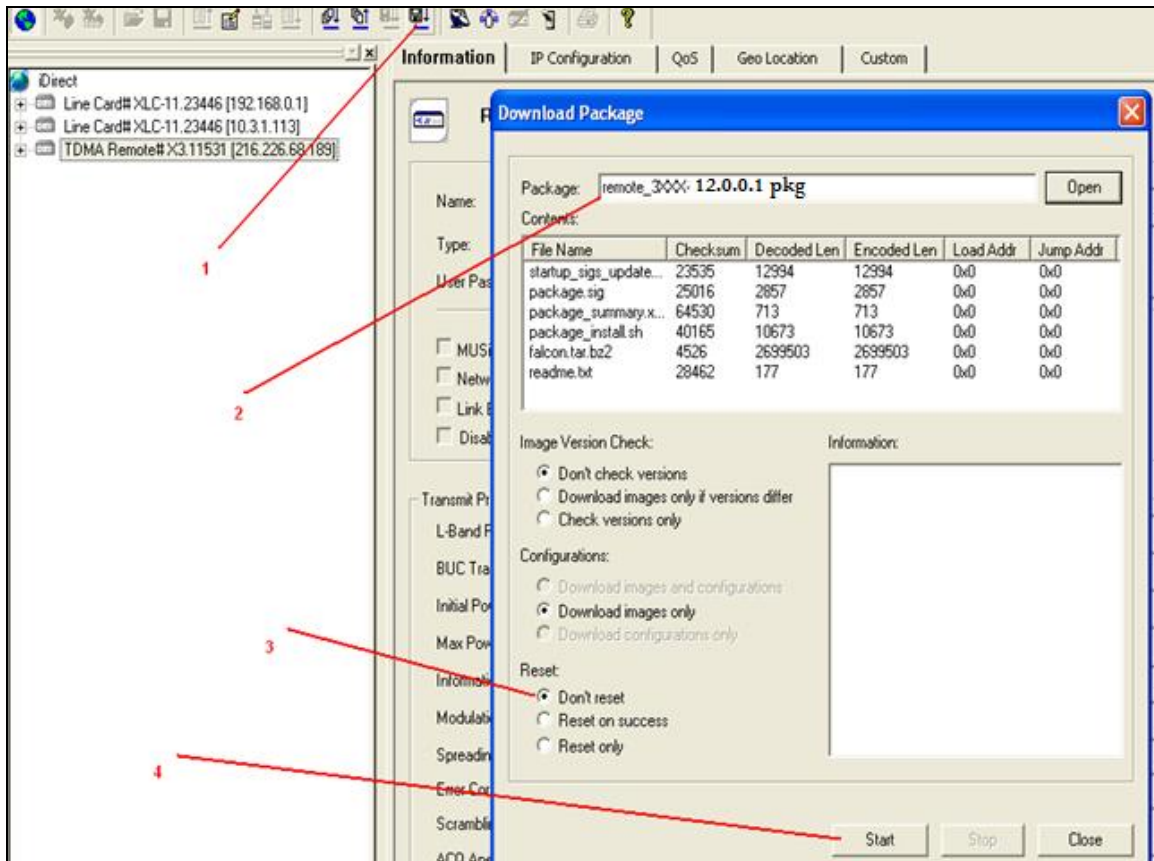

5. "Download Option from Disk" resetting the modem as shown on the picture on the following page:
6. Select the corresponding Options File (R####.opt)

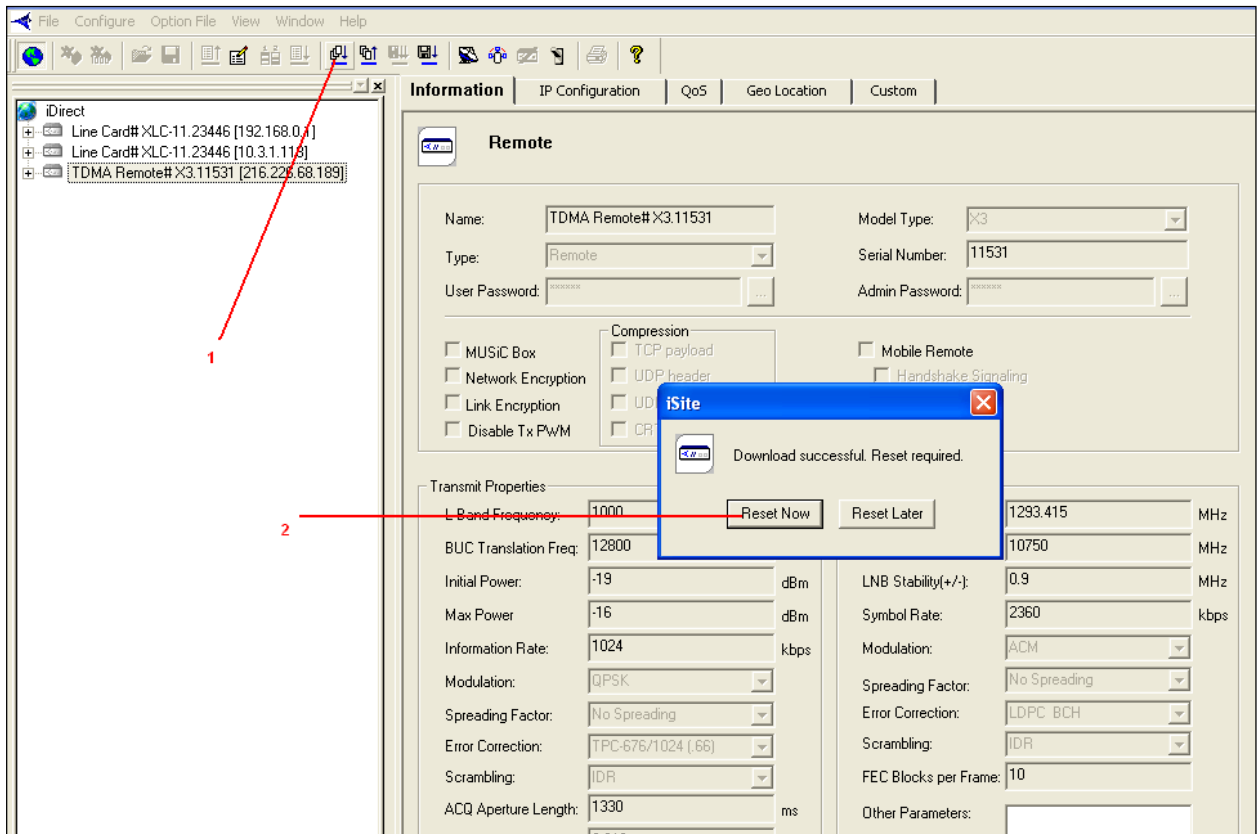

7. After completion, the remote should come up in the network. You're now ready to commission your site.